



## Monoblock pumps SM (GZA) Stainless steel centrifugal pumps AISI 304, AISI 316





## Characteristic







Monoblock centrifugal pumps SM (GZA) are designed for use in heating systems, cold and hot water supply, air conditioning, as well as for other industrial applications.

- maximum working pressure 10 bar,
- head 71 m,
- capacity 72 m<sup>3</sup>/h,
- maximum temperature of the pumped liquid 120°C
- pump housing and impeller material: stainless steel AISI 304, AISI 316.


Model (GB5662)	Model (DIN24255)	Power		Q	H(m)															
		KW	HP		0	150	200	300	333	400	600	700	900	200	1900	2100	2200	2300		
				L/min m <sup>3</sup> /h	0	9	12	18	20	24	36	42	54	72	114	126	132	138		
50-32-160/2.2	50-32-160/2.2	2.2	3.0	H(m)	37	34	32	27	25											
50-32-160/3.0	50-32-160/3.0	3.0	4.0		44	40	37,5	31	28											
50-32-200/4.0	50-32-200/4.0	4.0	5.5		55	52	49,5	43,5	40,5	37										
50-32-200/5.5	50-32-200/5.5	5.5	7.5		70,5	67,5	65	58,5	55	51										
65-50-125/2.2	65-40-125/2.2	2.2	3.0								17,5	14,9	13,4	10,7						
65-50-125/3.0	65-40-125/3.0	3.0	4.0								20,5	18,4	17	14,4	8					
65-50-160/4.0	65-40-160/4.0	4.0	5.5								26	24	22,5	20,5	14					
65-50-160/5.5	65-40-160/5.5	5.5	7.5								31	28,5	27	24,5	18					
65-40-200/7.5	65-40-200/7.5	7.5	10								38,5	36	35	32,5	26					
65-40-200/9.2	65-40-200/9.2	9.2	12.5									49	47,5	44,5	34					
80-65-125/4.0	65-50-125/4.0	4.0	5.5										19	17,3	13,5	6,3				
80-65-125/5.5	65-50-125/5.5	5.5	7.5										24	22,2	18,5	10,8	8			
80-65-160/7.5	65-50-160/7.5	7.5	10										29,5	27,8	24	16,1	13,4	12		
80-65-160/9.2	65-50-160/9.2	9.2	12.5										34,5	32,8	29	21,1	18,3	16,8		
80-50-200/11	65-50-200/11	11	15										38,5	37,1	33,5	25,8	23	21,5	20	
80-50-200/15	65-50-200/15	15	20										45,5	44	40,5	32,6	29,6	28	26,5	



# Operating characteristics

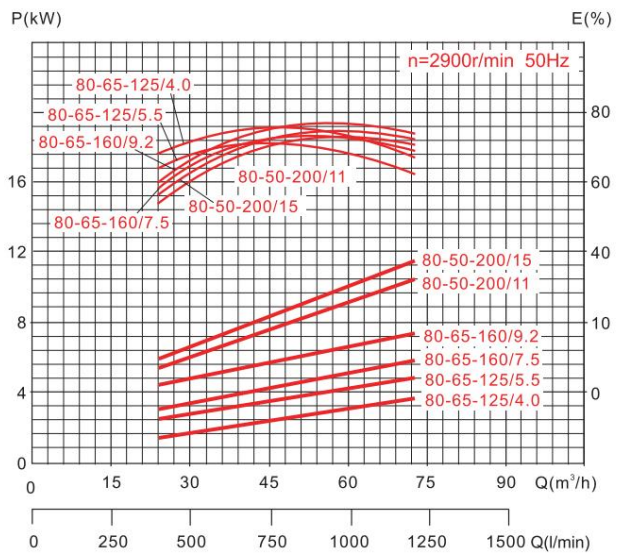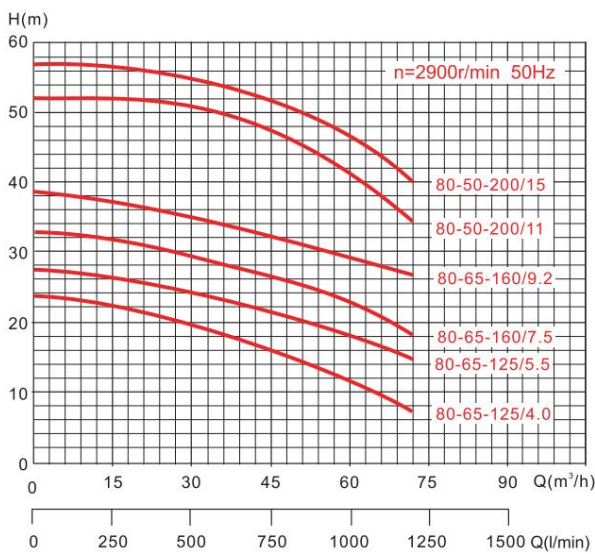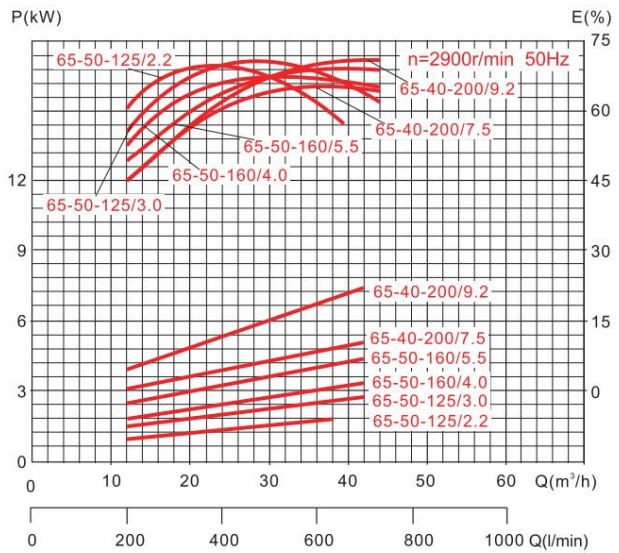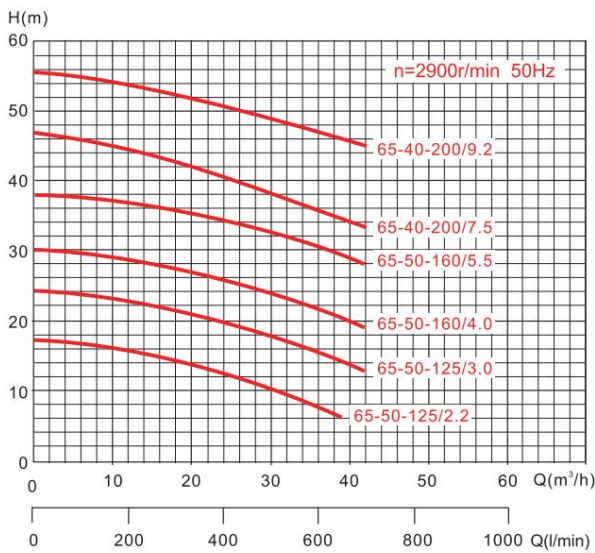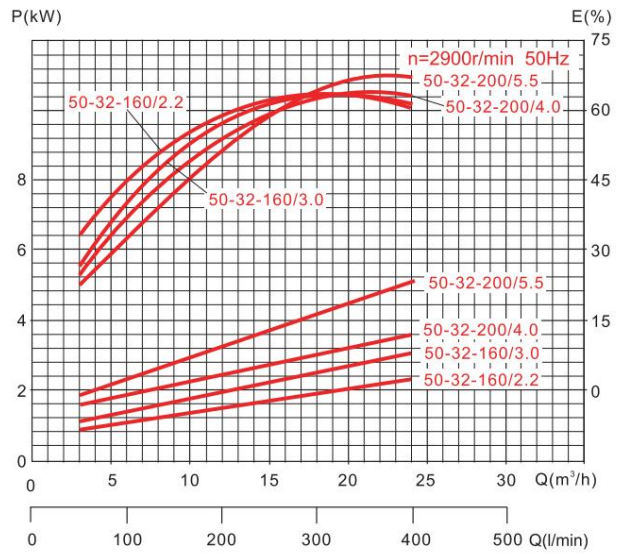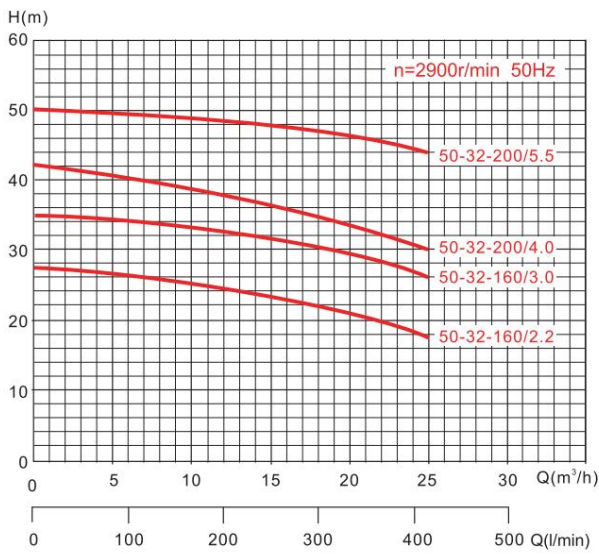

# dimensions

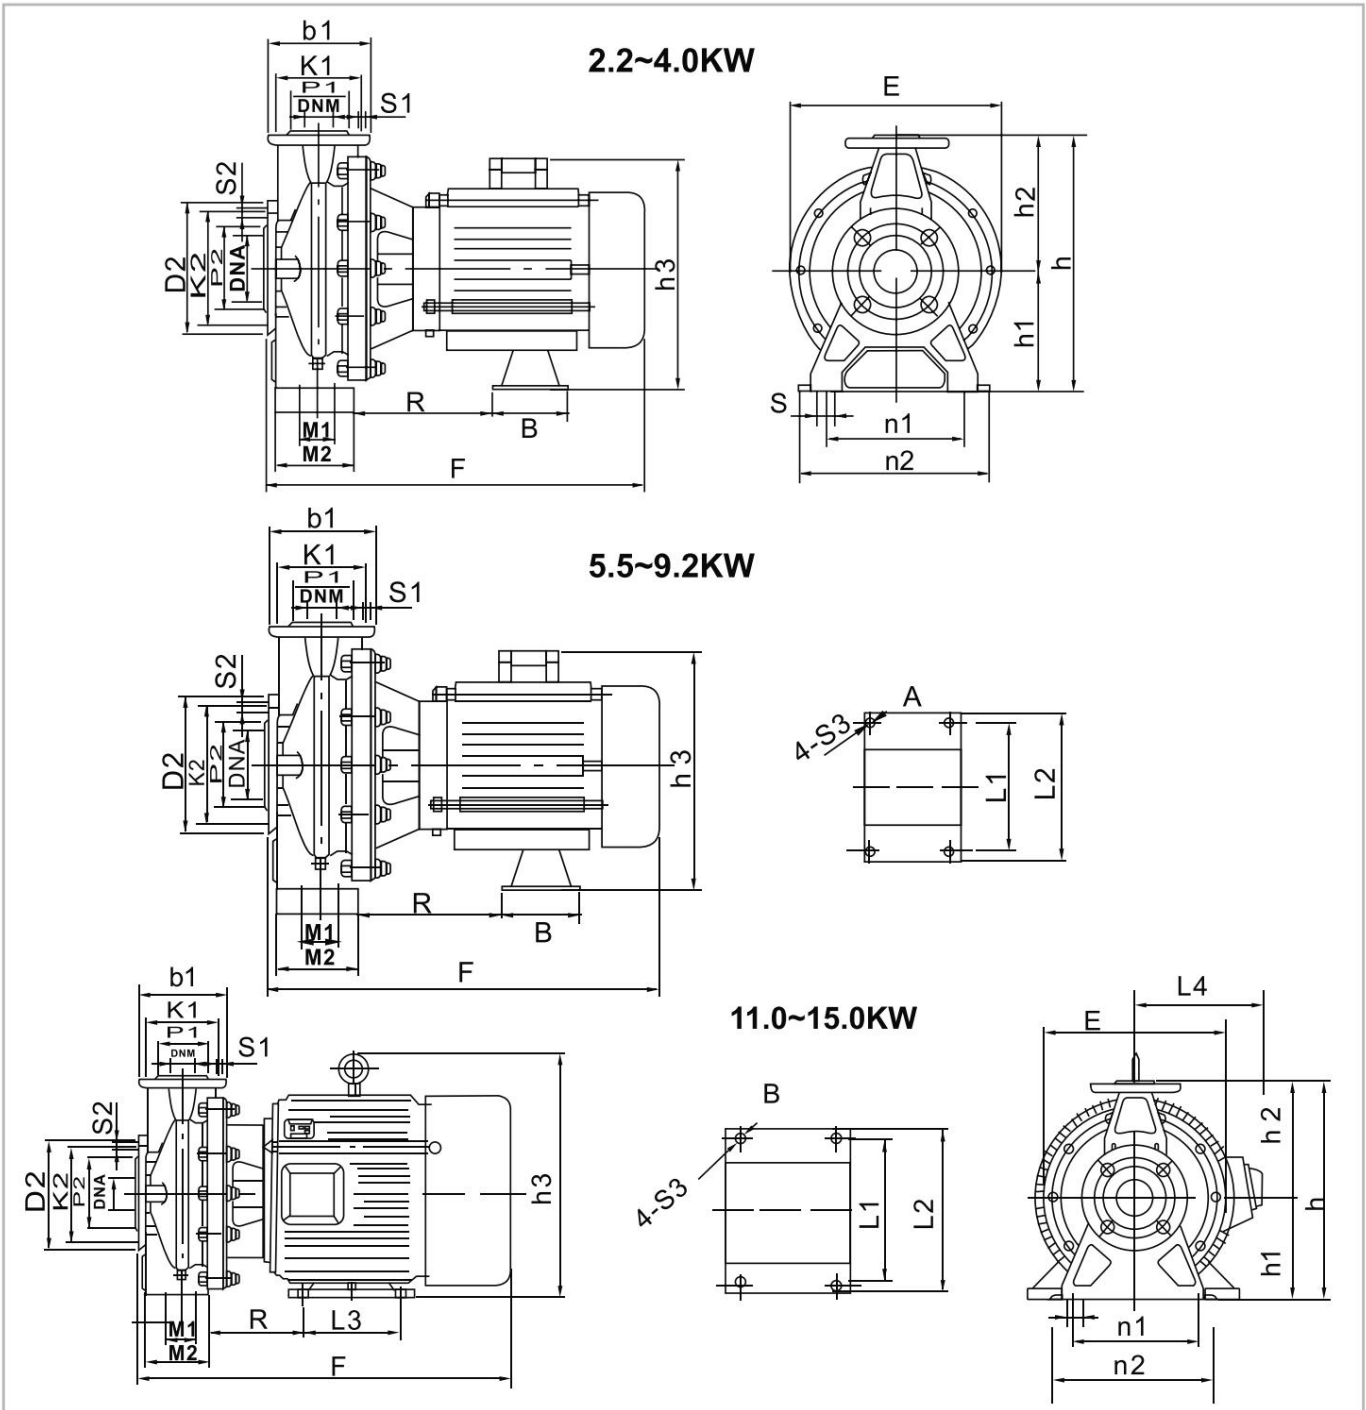

Model	φE	F	h	h1	h2	h3	a	m1	m2	n1	n2	S	B	R	P	L1	L2	L3	L4	S3	D2	K2	P2	S2	D1	K1	P1	S1	DNA	DNM	Weight (kg)
50-32-160/2.2	244	492	292	132	160	252	80	70	118	190	240	15	42	223	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	29.7
50-32-160/3.0	244	481	292	132	160	269	80	70	118	190	240	15	38	241	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	35.5
50-32-200/4.0	295	519	340	160	180	297	80	70	118	190	240	15	48	233	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	43
50-32-200/5.5	295	582	340	160	180	340	80	70	118	190	240	15	/	205	216	248	140	/	14	165	125	99	18	140	100	76	18	50	32	63	
65-50-125/2.2	244	489	292	132	160	252	80	70	118	190	240	15	42	220	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	30
65-50-125/3.0	244	479	292	132	160	269	80	70	118	190	240	15	38	238	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	36
65-50-160/4.0	244	479	292	132	160	269	80	70	118	190	240	15	48	233	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	40
65-50-160/5.5	244	582	219	132	160	312	80	70	118	190	240	15	/	/	205	216	248	140	/	14	185	145	118	18	165	125	99	18	65	50	62
65-40-200/7.5	295	602	340	160	180	340	100	70	136	212	265	15	/	/	205	216	248	140	/	14	185	145	118	18	150	110	84	18	65	40	68
65-40-200/9.2	295	641	340	160	180	340	100	70	136	212	265	15	/	/	224	216	248	140	/	14	185	145	118	18	150	110	84	18	65	40	78
80-65-125/4.0	244	509	340	160	180	297	100	70	142	212	265	15	48	243	/	/	/	/	/	/	200	160	132	18	185	145	118	18	80	65	41
80-65-125/5.5	244	612	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	62
80-65-160/7.5	244	612	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	67
80-65-160/9.2	244	651	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	77
80-50-200/11	295	696	360	160	200	385	100	70	140	212	265	15	/	/	215.5	254	330	210	265	15	200	160	132	18	185	125	99	18	80	50	135
80-50-200/15	295	696	360	160	200	385	100	70	140	212	265	15	/	/	215.5	254	330	210	265	15	200	160	132	18	185	125	99	18	80	50	146